



Izajes – Movimientos – Transporte

En HBM contamos con servicio de Grúa, Hidrogrúa y Semi-Playo.

Nos especializamos en la realización de montajes, el servicio de transporte y todas aquellas tareas que se encuentren dentro de las capacidades de nuestra maquinaria.

Nuestros equipos cuentan con certificaciones vigentes y se encuentran plenamente habilitados para operar tanto en instalaciones internas como en entornos externos. Asimismo, disponemos de operadores altamente calificados y debidamente certificados, lo que garantiza un servicio seguro, eficiente y de calidad.

A continuacion dejamos unas imágenes de nuestros equipos:

Mauricio Borda
Contactanos al 291-4295121
mauricioborda2009@hotmail.com

Grúa Link-Belt RTC 8030


Todoterreno con capacidad nominal de elevación de 30 toneladas







Working Range shown is for machine with fully extended outriggers. For working ranges of machine with intermediate (half extended) outriggers, fully retracted outriggers or on tires see Crane Rating Manual in machine.

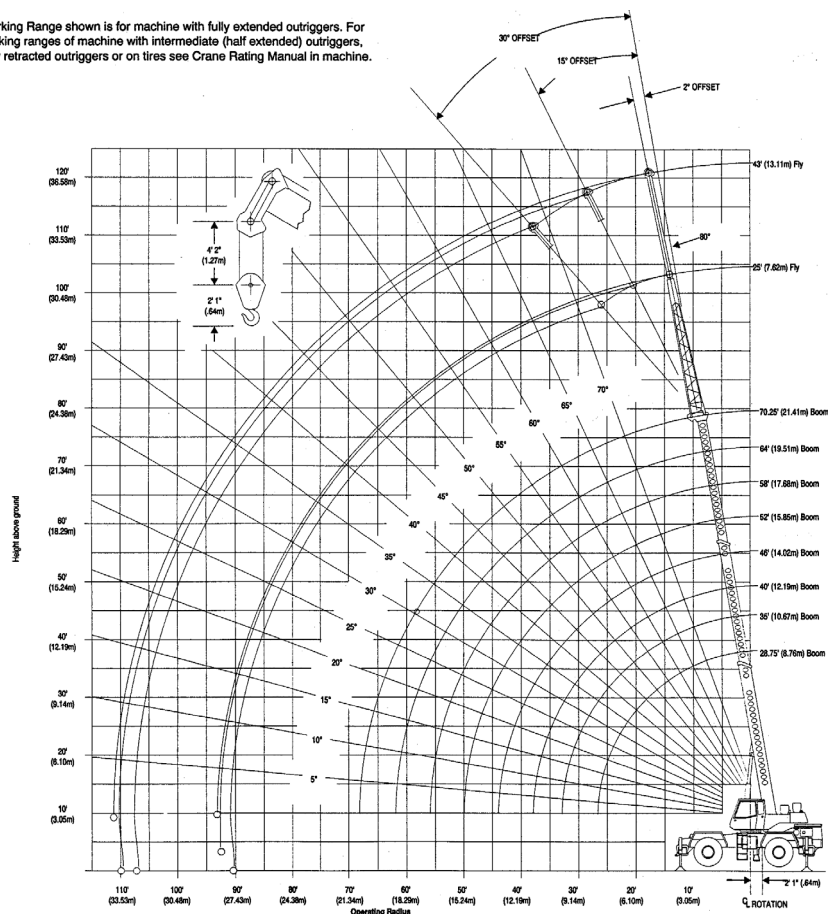

Outriggers Fully Extended																			
28.75' - 58' (8.76m - 17.68) Main Boom - Outriggers Fully Extended																			
LOAD RADIUS (ft./m)	28.75' (8.76m)			35' (10.67m)			40' (12.19m)			46' (14.02m)			52' (15.85m)			58' (17.68m)			LOAD RADIUS ft./m
	LOADED BOOM ANGLE (deg.)	360° (lbs./kgs)	OVER FRONT (lbs./kgs)	LOADED BOOM ANGLE (deg.)	360° (lbs./kgs)	OVER FRONT (lbs./kgs)	LOADED BOOM ANGLE (deg.)	360° (lbs./kgs)	OVER FRONT (lbs./kgs)	LOADED BOOM ANGLE (deg.)	360° (lbs./kgs)	OVER FRONT (lbs./kgs)	LOADED BOOM ANGLE (deg.)	360° (lbs./kgs)	OVER FRONT (lbs./kgs)	LOADED BOOM ANGLE (deg.)	360° (lbs./kgs)	OVER FRONT (lbs./kgs)	
10 3.05m	66.0	60,000 27 216	60,000 27 216	70.5	49,700 22 544	49,700 22 544	73.5	49,000 22 226	49,000 22 226	76.0	48,300 21 909	48,300 21 909	78.0	48,000 21 773	48,000 21 773			10 3.05	
12 3.66m	61.5	55,300 25 084	55,300 25 084	67.0	49,700 22 544	49,700 22 544	70.5	49,000 22 226	49,000 22 226	73.5	48,300 21 909	48,300 21 909	76.0	48,000 21 773	48,000 21 773	78.0	45,900 20 820	45,900 20 820	12 3.66
15 4.57m	54.5	43,300 19 641	43,300 19 641	61.5	43,300 19 641	43,300 19 641	66.0	43,300 19 641	43,300 19 641	69.5	43,300 19 641	43,300 19 641	72.5	41,400 18 779	41,400 18 779	74.5	39,300 17 826	39,300 17 826	15 4.57
20 6.10m	40.5	31,200 14 152	31,200 14 152	52.0	31,200 14 152	31,200 14 152	57.5	31,200 14 152	31,200 14 152	62.5	31,200 14 152	31,200 14 152	66.5	31,200 14 152	31,200 14 152	69.5	31,200 14 152	31,200 14 152	20 6.10
25 7.62m	20.5	23,500 10 660	23,500 10 660	40.0	23,500 10 660	23,500 10 660	48.5	23,500 10 660	23,500 10 660	55.0	23,500 10 660	23,500 10 660	60.0	23,500 10 660	23,500 10 660	64.0	23,500 10 660	23,500 10 660	25 7.62
30 9.14m				24.5	19,200 8 709	19,200 8 709	37.5	19,200 8 709	19,200 8 709	47.0	19,200 8 709	19,200 8 709	53.5	19,200 8 709	19,200 8 709	58.0	19,200 8 709	19,200 8 709	30 9.14
35 10.67m							23.0	15,100 6 849	15,900 7 212	37.5	15,100 6 849	15,900 7 212	46.0	15,100 6 849	15,900 7 212	52.0	15,100 6 849	15,900 7 212	35 10.67
40 12.19m										25.0	12,000 5 443	13,400 6 078	37.5	12,000 5 443	13,400 6 078	45.0	12,000 5 443	13,400 6 078	40 12.19
45 13.72m													28.5	9,800 4 445	11,400 5 171	37.5	9,800 4 445	11,400 5 171	45 13.72
50 15.24m																27.5	8,100 3 674	9,900 4 491	50 15.24
0 Angle Capacity		12,000 5 443	14,000 6 350		8,300 3 765	10,600 4 808		6,500 2 948	8,800 3 992		5,000 2 268	6,000 2 722		4,000 1 814	5,500 2 495		3,200 1 452	4,500 2 041	

Hidrogrúa Ambco Veba 26 toneladas

Su pluma se extiende 13 mts de manera telescópica



